


## Flat Line\_ exterior and interior use

Dimensions (mm)


### Rectangle

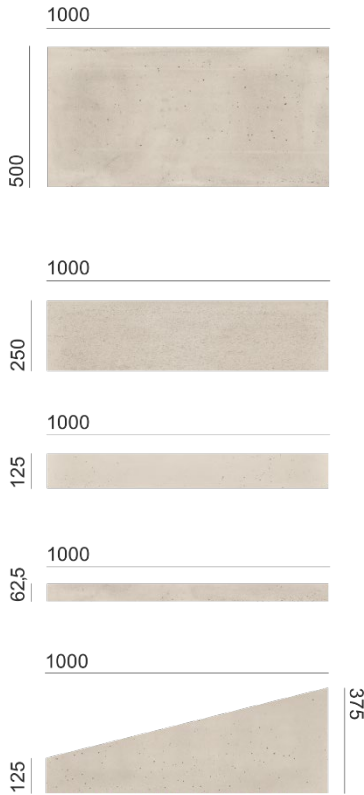

### Square




### Triangle

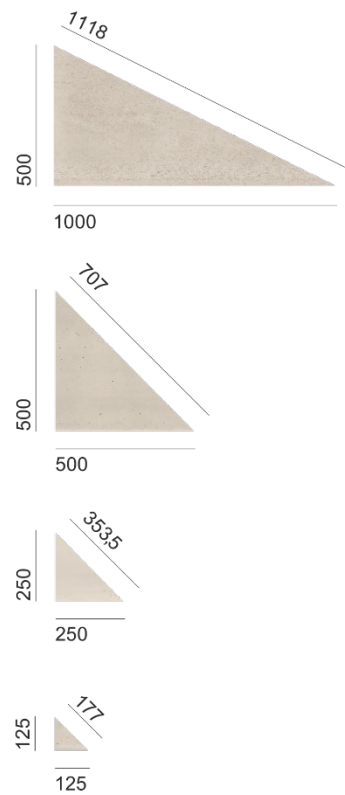


Model	Dimensions mm	Quantity Pallet	Boxes/ Pallet	Quantity Box	Pieces/ Box	Weigh tm2	Weight Box	Weight Pallet
Rectangle	1000x500x3	125 m2	25 un.	5 m2	10 un.	± 4 kg	± 20 kg	± 500 kg
Rectangle	1000x250x3	85 m2	34 un.	2,5 m2	10 un.	± 4 kg	± 10 kg	± 370 kg
Rectangle	1000x125x3	85 m2	34 un.	2,5 m2	20 un.	± 4 kg	± 10 kg	± 370 kg
Rectangle	1000x62,5x3	85 m2	34 un.	2,5 m2	40 un.	± 4 kg	± 10 kg	± 370 kg
Rectangle	1000x37,5x3	85 m2	17 un.	5 m2	20 un.	± 4 kg	± 20 kg	± 370 kg
Square	500x500x3	170 m2	34 un.	5 m2	20 un.	± 4 kg	± 20 kg	± 710 kg
Square	250x250x3	56 m2	45 un.	1,25 m2	20 un.	± 4 kg	± 5 kg	± 255 kg
Square	125x125x3	56 m2	45 un.	1,25 m2	80 un.	± 4 kg	± 5 kg	± 255 kg
Triangle	1000x500x3	125 m2	25 un.	5 m2	20 un.	± 4 kg	± 20 kg	± 500 kg
Triangle	500x500x3	170 m2	34 un.	5 m2	40 un.	± 4 kg	± 20 kg	± 710 kg
Triangle	250x250x3	56 m2	45 un.	1,25 m2	40 un.	± 4 kg	± 5 kg	± 255 kg
Triangle	125x125x3	56 m2	45 un.	1,25 m2	160 un.	± 4 kg	± 5 kg	± 255 kg

## Groove Line\_ exterior and interior use


Dimensions (mm)



**Full Dash**



**Half Dash**



**Origin**



Model	Dimensions mm	Quantity Pallet	Boxes/ Pallet	Quantity Box	Pieces/ Box	Weig htm2	Weight Box	Weight Pallet
Full Frontier	1000x500x3	125 m2	25 un.	5 m2	10 un.	± 4 kg	± 20 kg	± 500 kg
Full Dash	1000x500x3	125 m2	25 un.	5 m2	10 un.	± 4 kg	± 20 kg	± 500 kg
Origin	1000x500x3	125 m2	25 un.	5 m2	10 un.	± 4 kg	± 20 kg	± 500 kg
Half Frontier	500x500x3	170 m2	34 un.	5 m2	20 un.	± 4 kg	± 20 kg	± 710 kg
Half Dash	500x500x3	170 m2	34 un.	5 m2	20 un.	± 4 kg	± 20 kg	± 710 kg
Stripped	250x250x3	56 m2	45 un.	1,25 m2	20 un.	± 4 kg	± 5 kg	± 255 kg

## Patch Line\_interior use

Dimensions (mm)

### Trio

249,96



Trio Cement\*



Trio Summer Breeze  
Saffron | Scarlet | Terracota



Trio Salty Lake  
Salt | Coal | Lagoon



Trio Bright Forest  
Cement | Wolf | Moss



Trio Light Ashes  
Salt | Cement | Wolf



Trio Burnt Wood  
Wolf | Coal | Cement

\*Also available in the colours Coal, Wolf, Salt, Brick, Scarlet, Terracota, Saffron, Moss and Lagoon.

### Muretto

249,9



Muretto Cement\*



Muretto Light Ashes  
Salt | Cement | Wolf



Muretto Burnt Wood  
Wolf | Coal | Cement

Model	Dimensions mm	Quantity Pallet	Boxes/Pallet	Quantity Box	Pieces/Box	Weight m2	Weight Box	Weight Pallet
Trio	288,6x249,96	65 m2	45 un.	1,44 m2	20 un.	± 4 kg	± 5,77 kg	± 290 kg
Muretto	1000x249,9	55 m2	34 un.	1,63 m2	10 un.	± 4 kg	± 6,5 kg	± 251 kg

## Available colours



## Product description

Slimcrete Wall combines the flexibility of fibre technologies with the strength and durability of cement, making for a unique product. Composed of 30% cement, 65% selected natural minerals, 5% technical fibres, specific additives and Dual Clean

## Production method


Slimcrete Wall is manufactured with exclusive high-tech equipment, double-pressed process to ensure its high quality, Slimcrete Wall undergoes a surface treatment and waterproofing process making it waterproof, water repellent and an exclusive self-cleaning system.

## Colour


The colour process of Slimcrete Wall is mass-pigmented. Colour variations are possible due to the fact that it is a natural product, depending on panel orientation, viewing angle, lighting effects and humidity. With the passage of time, Slimcrete Wall may become slightly lighter. As it is a product made from natural concrete, the pieces may present random differences in colour and/or texture between them. Thus, the final installation will always be unique.

The images shown here show an example of a 1000x500mm random pattern:

**Cement**

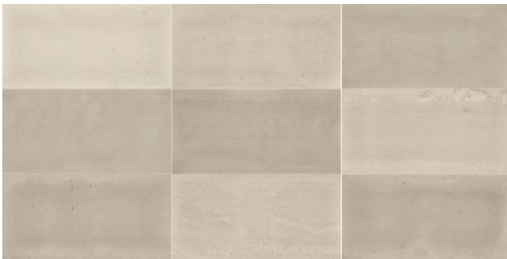

**Wolf**

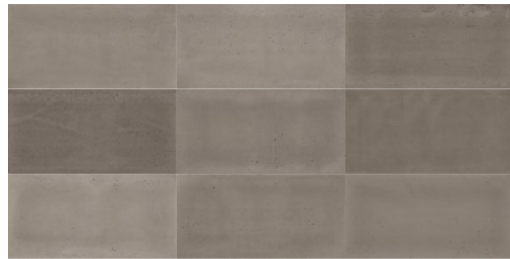

## Applications



**Walls**
























**Ceilings**



**Facades**

## Advantages / Technical properties

 True concrete	 Dual Clean Protection	 Weather resistance
 Unique pieces	 Fixcrete Adhesive – 102 e	 High temperature resistance
 Ecological and Sustainable	 High impact resistance	 High resistance to the freeze/ defrost
 Interior / Exterior	 High physical and mechanical resistance	 Excellent UV resistance
 Easy processing	 +/- 1.0% square	 B, s1, d0
 Curvature $\geq$ 400 mm diameter	 Dimensional stability	 High resistance to humidity
 4 kg m <sup>2</sup> / $\pm$ 5 %	 3 $\pm$ 0,5mm	 High resistance to micro-organisms

## Maintenance and cleaning

Slimcrete contains a self-cleaning surface treatment, which makes it easier to clean off minor dirt. When cleaning, we recommend using neutral cleaning products and rinsing with clean water. It is strictly forbidden to use acidic products, solvents and/or others that deteriorate the cement and cause irreparable damage to the products.

## Additional information

All additional information on the different applications can be found in the Slimcrete Wall application tips. This technical sheet replaces the previous ones. ACL reserves the right to amend this technical sheet without prior notice. The reader should ensure that they have the latest version of this document