



FIXED



BASAMENTI FISSI PER PAVIMENTAZIONI SOPRAELEVATE DA ESTERNO

FIXED PAVING SUPPORT SYSTEMS FOR RAISED FLOORS FOR EXTERIORS


Il BASAMENTO ITALPROFILI® in POLIPROPILENE permette di risolvere i problemi che sorgono nella realizzazione delle pavimentazioni. Infatti è costruito principalmente da uno zoccolo di plastica inalterabile che viene posizionato direttamente sul manto. Su questo vengono poggiati successivamente, senza malte o cementanti, i quadroni di pavimentazione. Esso è corredato di guide di posizionamento che impediscono lo slittamento del quadrone stesso e nello stesso tempo, ne sopportano le dilatazioni termiche. La base del supporto in POLIPROPILENE è opportunamente sagomata in modo da permettere facilmente lo scolo delle acque che possono così scorrere direttamente sul manto impermeabile, con l'eliminazione della possibilità di sacche d'acqua.

ITALPROFILI® FIXED SUPPORT quickly and easily resolve problems arising from the installation of a paving system. The support consists of a high resistance base which is placed directly onto the waterproofing cap sheet. The paving slabs are then placed directly onto the supports without the use of concrete or adhesives of any sort. The base is fitted with guides which position and anchor perfectly the paving slabs and which at the same time act as expansion joints. The base of the support is made of HDPE and its shape allows rainwater to drain and flow of easily on the underlying waterproofing membrane, thus also eliminating any chance of ponding caused by the supports themselves trapping water.




ART. 61

Art.	61
D	150
H	10
A	7

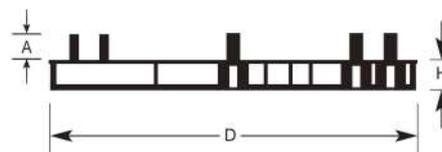


ART. 61.1


Art.	61.1
D	150
H	15
A	11

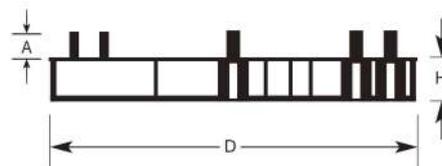

ART. 63.1


Art.	63.1
D	150
H	20
A	12

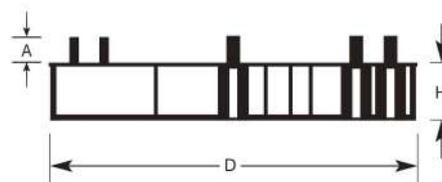

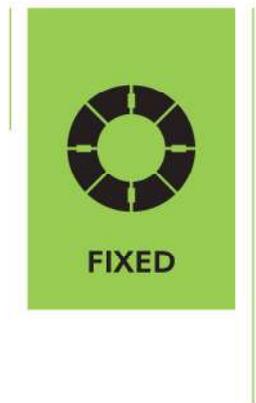


ART. 64.1

Art.	64.1
D	150
H	30
A	12

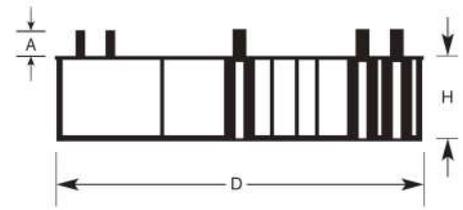


ART. 65

Art.	65
D	150
H	3

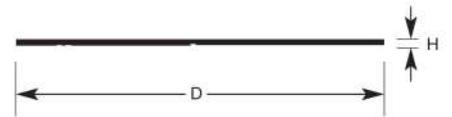


ART. 61.1S

Art.	61.1S
D	175
H	15
A	12

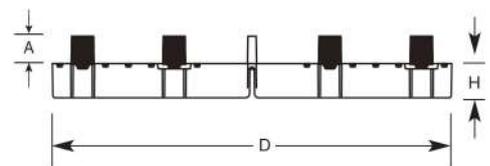

ART. 65S

Art.	65S
D	175
H	3

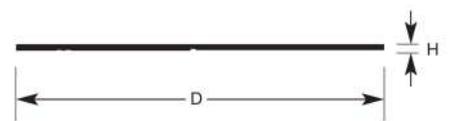



FIXED



PAVIMENTAZIONI SOPRAELEVATE DA ESTERNO
RAISED FLOORS FOR EXTERIORS

ARTICOLI OPZIONALI
OPTIONAL ITEMS

BASAMENTI FISSI PER PAVIMENTAZIONI SOPRAELEVATE DA ESTERNO FIXED PAVING SUPPORT SYSTEMS FOR RAISED FLOORS FOR EXTERIORS

Tutti i basamenti ITALPROFILI® sono modulari e sovrapponibili, in modo da consentire il raggiungimento dello spessore (di intercapedine) desiderato, uniformando eventuali difformità planari della superficie con appositi spessori. Lo scopo principale del nuovo basamento è quello di eliminare principalmente le fessurazioni che si possono creare nel manto impermeabile a causa della diversa dilatazione termica subita dalla pavimentazione calpestabile. Inoltre altri vantaggi aggiuntivi, ma non secondari, appaiono il basso costo di posa in opera, la grandissima facilità di rimozione del piano di calpestio in caso di necessaria ispezione al manto sottostante, cosa possibile inoltre senza rottura di alcun quadrone, in ultimo, assicura una certa coibentazione della copertura stessa dovuta all'intercapedine formata tra manto e piano di calpestio.

All of the supports are modular and can be stacked so as to achieve the height or thickness of gap underneath the paving desired, and eliminating any unevenness of the roof deck itself. The supports are designed to eliminate cracking and damaging of the waterproofing membrane caused by expansion and contraction of the paving or damage caused by walking on the paving. Over and above these advantages it is also a very quick and cost effective means of installing the paving. The paving can be readily removed and replaced should it become damaged or should inspection of the waterproofing be necessary, without any damage at all. The system also forms an insulation layer of air between the lower surface of the paving and the waterproofing and protects the waterproofing itself from damage by exposure to sunlight. ITALPROFILI® support has been designed to fully interlock when stacking, various heights raised paving can be achieved from 10 mm. upwards. Combinations of supports and leveling shims will allow the gradual increase in raising heights, thereby giving a level finish with all drainage falls under the slabs.

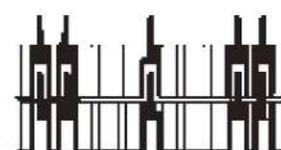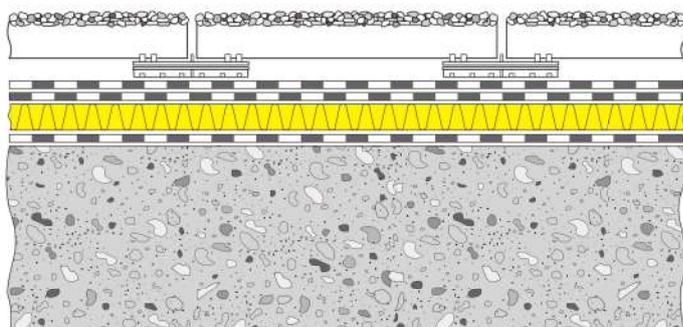



ART. 185DP4
DISTANZIALE PERIMETRALE INOX FUGA 4 mm

Il distanziale perimetrale viene posato direttamente sopra la testa permettendo di tenere distanziata di 5 mm. la pavimentazione dal perimetro verticale di contenimento. Opportunamente sagomato per evitare lo sfregamento della pavimentazione sul perimetro verticale di contenimento ed assorbire eventuali movimenti e dilatazioni della pavimentazione. Realizzato in acciaio inox, spessore di 0,8 mm.

PERIMETRAL SPACER STAINLESS STEEL FOR HEAD SPACER 4 mm

The perimetral spacer is laid directly on the head allowing to keep the flooring of a distance of 5 mm from the vertical containment perimeter. Suitably shaped to avoid the rubbing of the pavement on the vertical containment perimeter and to absorb any movement and expansion of the pavement. Made of stainless steel, 0.8 mm thick.



Art. 195
VENTOSA
ALZAPIASTRELLE
110KG
SUCTION CUP TILE
LIFTER 110KG



Art. 190
PINZA POSAPIASTRE PER
PIASTRE DI LATO 30 - 35 -
40 - 45 - 50 CM
PAVING SLAB HANDLER 30 -
35 - 40 - 45 - 50 CM